

# TWINLED

TYPE:

PROJECT NAME:

## R&S Antonangeli 2008

Con Twin-led doppie emissioni di luce, orientabili, consentono di ottenere due coni luminosi contrapposti per luci d'accento e segnalazione percorsi.  
Struttura: picchetto zincato. Parete cromosatinato o bronzo, spot a doppio LED bianco/bianco, blu/blu, bianco/blu, bianco/ambra, ambra/ambra.



*With Twin-led the double adjustable light's emissions permit to obtain to opposite light's cones for lighting accents and steps' signs.*

*Structure: galvanized picket. Wall satined chrome or bronze spot double LED white/white, blue/blue, white/blue, white/ambre, ambre/ambre.*

Installation note 1: model W1 comes with backplate to cover junction box

Installation note 2: model F1 requires remote driver installation

### W1

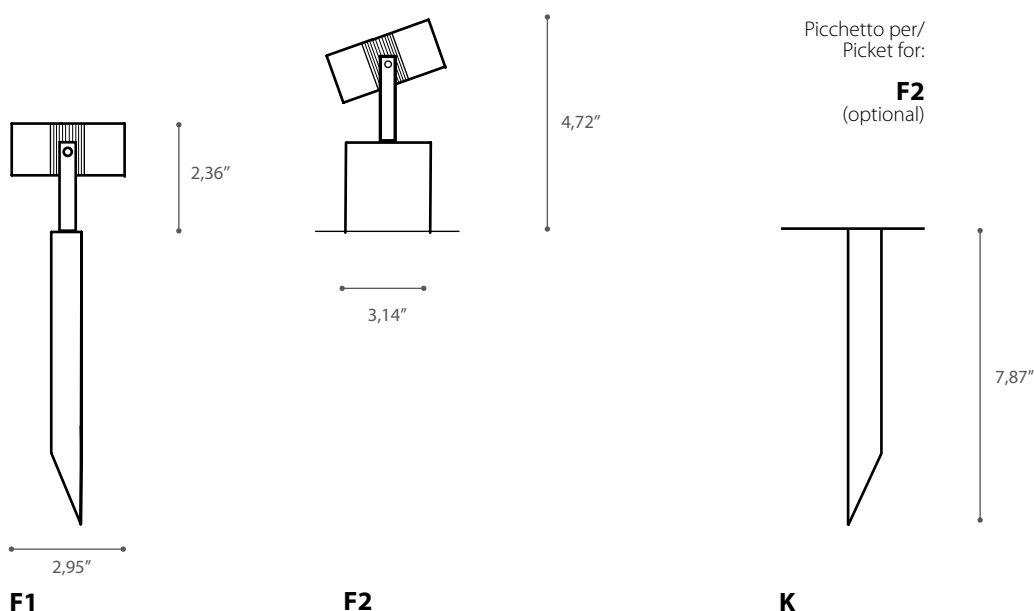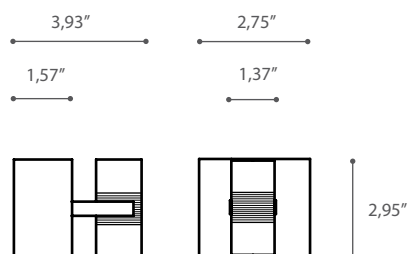


SPECIFICATION SHEET

**W1** Alimentatore incorporato IP67/ Inside converter 350mA 2LED 1W cad

**F2** Alimentatore incorporato IP67/ Inside converter 350mA 2LED 1W cad

**F1** Alimentatore non incluso/ converter not included  
Processo di connessione-Sistema di alimentazione, vedere pag244/  
Connecting process-Converter System Joining, see page 244



2 LED **SCANGIFT**

WWW.SCANGIFT.COM





